



Code: 1110710

Pro 615

Features

This unit is ideally suited for small businesses offering a TV battery recharging service or large vehicle workshops where up to 6 x 12V batteries need to be charged simultaneously. 3 batteries are connected in series and this is connected to 1 set of charging leads (Bank 1). A second set of 3 batteries connected in series can be connected to the second set of charging leads (Bank 2). A voltage selector switch allows the user to select 12V, 24V or 36V for each bank. The charge rate selector is used to control the current on each bank. Each bank is protected on the input side by an internal mains fuse and on the output side by a circuit breaker and a fuse.
NOT RECOMMENDED FOR SEALED BATTERIES

The Pro chargers were designed in compliance with IEC 335-2-2 and has a two year limited warranty against defects in materials and workmanship.

- * Conforms to SABS IEC 335-2-29
- * Thermal overload protection
- * Automatic circuit breaker protection
- * Robust, epoxy coated steel cabinet
- * Two year warranty
- * Manufactured in South Africa

Detailed Specifications

Rated Input Voltage	- 230V a.c.	- 230V a.c.
Volt Selector	- 12 Volts	- 24 Volts
Current Selector	- 5	- 5
Rated Input Current	- 0,95 A a.c.	- 1,7 A a.c.
Rated Output Voltage	- 14V d.c.	- 27V d.c.
Rated Output Current	- 10A d.c.	- 10A d.c.


Rated Input Voltage	- 230V a.c.
Volt Selector	- 36 Volts
Current Selector	- 5
Rated Input Current	- 2,7 A a.c.
Rated Output Voltage	- 43V d.c.
Rated Output Current	- 10A d.c.

Dimensions (WxHxL) - 445/200/220 mm

Dimension WIDTH is front view

Weight Nett/Gross - 17/17,4 Kg

In the interest of product improvement, specifications may change without notice.

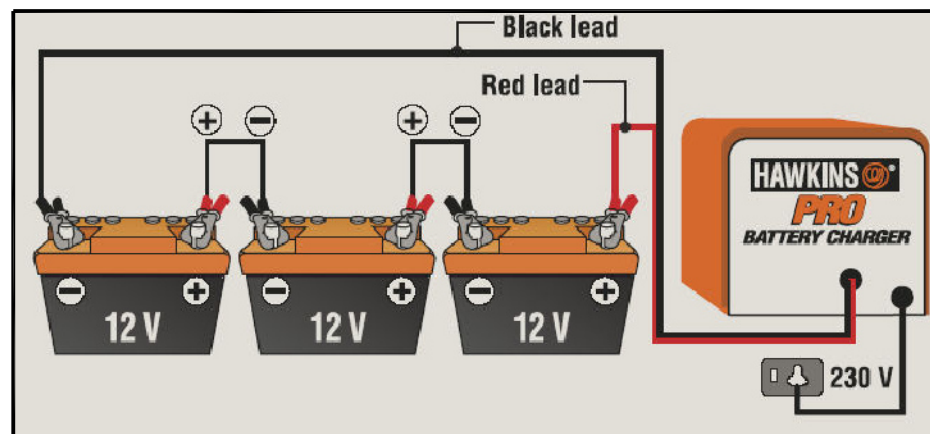

Manufactured in South Africa

HAWKINS 
 MANUFACTURING (Pty) LTD

BATTERY CHARGERS AND INVERTERS

Tel: (031) 579-2813

Fax: (031) 579-4642

e mail: info@hawkins.co.za

Web Site: www.hawkins.co.za



T-0420-000-R01 - PRO 615.pdf