Power 10

Code: 1110400

Detailed Specifications

Rated Input Voltage	:	230V a.c.
Rated Input Current	:	0,6 A a.c.
Rated Output Voltage	:	12V d.c.
Rated Output Current	:	6,4A d.c.
Min Ah	:	20Ah
Dimensions (WxHxL)	:	245/145/150 mm
Dimension WIDTH is front view		
Weight Nett/Gross	:	4,7/4,8 Kg

In the interest of product improvement, specifications may change without notice.

Manufactured in South Africa

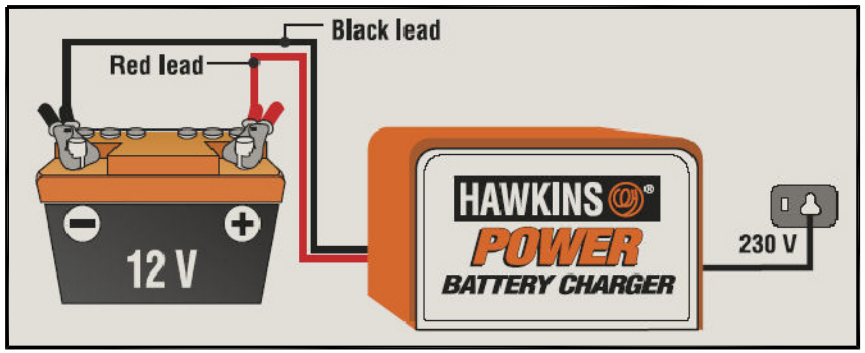

Features

The Hawkins range of domestic battery chargers is intended to meet market requirements for low cost automotive battery chargers. These units are made from high quality materials and components. These chargers are designed for flooded lead acid batteries.

The Power 10 charger has been designed especially for the descerning farmer, caravaner, power/ski boater and householder who requires a reliable and robust battery charger. It will continue to trickle past the nominal 13,8V of the fully charged battery and must be monitored periodically. These chargers are not automatic and therefore not reccommended for sealed batteries.

The Power range of chargers were designed in compliance with IEC 335-2-2 and has a two year limited warranty against defects in materials and workmanship.

* Conforms to SABS IEC 335-2-29
* Thermal overload protection
* Automatic circuit breaker protection
* Easy to follow instructions
* Robust, epoxy coated steel cabinet
* Two year warranty
* Manufactured in South Africa

HAWKINS®
MANUFACTURING (Pty) LTD

BATTERY CHARGERS AND INVERTERS

Tel: (031) 579-2813 Fax: (031) 579-4642
e mail: info@hawkins.co.za Web Site: www.hawkins.co.za